ERJO RECHIPPER

- Self-excited
- Built-in ejector fan
- Robust, plain and extremely reliable in running





Box 23 S-341 00 LJUNGBY, SWEDEN Phone: 0372/308 80 Nym O3/2-30385 ner

ERJO RECHIPPER TYPE 550 S

For reduce oversize chips coming from chip screens in sawmills, paper- and boardmills.

The rechipper is selfexcited and therefore extremely reliable in running.


Large feed opening which prevents the material from sticking in the infeed chute and from causing breake downs.


The rechipper shall be instalated in direct ad-

hesion to chip screens, and have built-in ejector fan with adjustable air volume and throws the chips automatically onto the chip screen.

The rotating chipper knives are adjustable for different chip lengths. The adjustment is easily done with adjusting screws.

The adjacent iron is reversible and all four edges can be utilized.

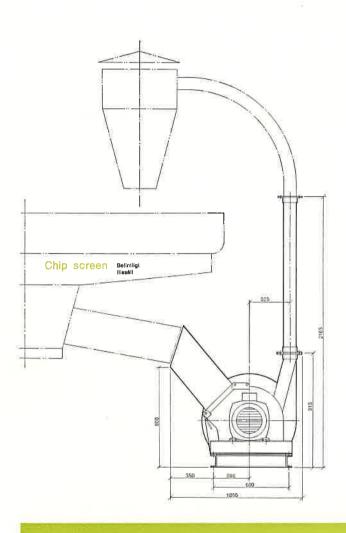

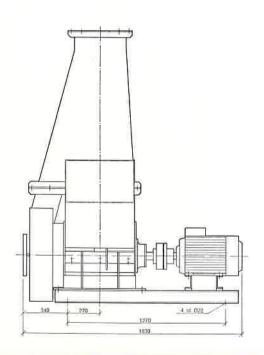

TECHNICAL SPECIFICATIONS

Infeed chute
Discharge chute
Diameter of cutter
Diameter of axle
No. of chipper knives
Dim. of chipper knives
Speed
Capacity
Power required
Effective returning high
Weight vithout motor

500×275 mm 410×100 mm Ø 450 mm Ø 60 mm 4 550×75×10 mm 1400 r.p.m. 10–30 m³ chips/h 25–50 HP 5 m about 750 Kg